



UVC-HDMI capture converter

4K UVC camera to HDMI conversion

WEBCAM signal transcoding

Low Power consumption

Power from standard USB-C PD PSU's

Support for USB Bluetooth controls

The ideal companion for USB cameras

Support for 4K USB-C video devices
Connect high quality USB Cameras
Output to any HDMI 2.0 display up to 4K@60
Lossless high definition video adapter






Empowering push streaming switchers

Empowering push streaming switchers


Transform streaming switchers into live presentation mixers, taking USB 3.0 streams to HDMI screens, projectors and displays.

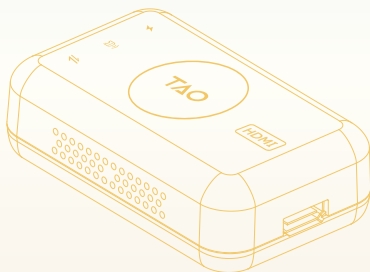



Enabling remote camera controls


TAO 1tiny supports connection of USB control devices such as Bluetooth Receivers, allowing a connected webcam to be controlled without the need for web or pc software.





Efficient low-power by design

Power TAO 1tiny and UVC webcam conveniently with common USB-C hubs and power banks.





Specification

Connectors	Input	Type C	1×USB-C
	Output	HDMI 2.0	1×HDMI-A
	Control	USB 2.0	1×USB-A
	Power		1×PD Type C
Performance	Input Resolutions	Type C	
		SMPTE	720p@25/30/50/60 1080p@30/50/60 2160p@30
		VESA	1280×720@30/50/60 1280×768@60
			1920×1080@25/30/50/60 3840×2160@30
	Output Resolutions	HDMI	
		SMPTE	720p@25/30/50/60 1080p@30/50/60 2160p@30/60
		VESA	1280×720@30/50/60 1280×768@60
			1920×1080@25/30/50/60 3840×2160@30/60
Power	Supported Standard	HDMI	2.0
		USB	3.0
	Decoding Formats	MJPEG YUV H.264	
	Compatibility	Camera with UVC1.1/UVC1.5 protocol	
	Input Voltage	9V/2A or 5V/2A(depends on adapter)	
	Max Power	18W	
Environment	Temperature	0°C~55°C	
	Humidity	20%~55%	
Physical	Weight	Net	0.08kg
		Package	0.136kg
	Dimension	Net	90.5mm × 55.5mm × 27.2mm
		Package	104mm × 92mm × 37mm



WEB: www.rgblink.com EMAIL: taotiny@rgblink.com PHONE: +19033001197